

EDELWEISS-COMPOUNDING TAILOR-MADE EXTRUSION CONCEPTS FOR RECYCLING AND COMPOUNDING.



KRAUSSMAFFEI SOLUTIONS FOR RECYCLING AND COMPOUNDING

Example I: Recycling and compounding with twin-screw extruder

Task: Processing of PP recyclate (washed and dried) with up to 30% talcum Capacity: Up to 3.000 kg/h Target: Production of compounds Scope: Complete plant from silo to silo

Example II: EdelweissCompounding with twin-screw and twin-screw extruder

Task: Recycling of post-consumer waste (PP, PE, DSD) and general compounding (filling, reinforcing, colouring, adding of additives, etc.)

Recycling capacity: Up to 3.500 kg/h

Compounding capacity: Up to 6.000 kg/h

Target: Production of compounds 100% comparable to virgin quality compounds

Scope:

- Preparation by customer
 - (washing, grinding, sorting, etc.)
- Material handling/feeding system for recycling extruder
- Cutter Compactor (optional)
- Twin-screw extruder for recycling
- Melt pump and filtration
- Twin-screw extruder for compounding
- LIW-Feeding system for compounding extruder
- Pelletizing system
- Finished product handling
- Control system for whole line




ZE BluePower twin-screw extruder series stands out for numerous innovative features in terms of energy efficiency and process engineering

EdelweissCompounding with twin-screw and twin-screw extruder



Concept overwiew EdelweissCompounding

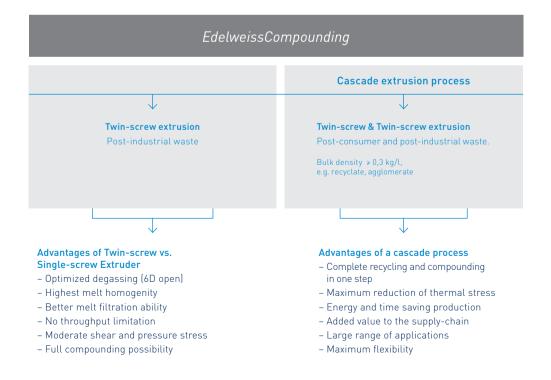

TAILOR-MADE EXTRUSION CONCEPTS FOR RECYCLING AND COMPOUNDING PROCESSES EDELWEISSCOMPOUNDING



kraussmaffei.com